

Projection Screen Matt White

Perfect For: • Decorative/Scenic • Film & TV • Stage • Event



Inspiration in every performance

Contents

Composition & Care

230 cm 3

Fire Test Certificate

BS5867 Part 2 Type B 5

M1 9

M2 16

TECHNICAL



NDFR

Non Durably Flame Retardant

chemically treated with a water solution and if wetted in any way should be retreated



DFR

Durably Flame Retardant

chemically treated to withstand a number of cleanings



IFR

Inherently Flame Retardant

woven from fibres with a high flame retardancy



FR

Flame Retardant

chemically treated to an individual specification



NOT FR

Not Flame Retardant no flame retardant treatment



Confirmation that the fabric meets one or more flame retardant standards

BS5867 BS5867 Pt2 B is the British Standard for flame retardant fabrics used for curtains and drapes

BS5852 BS5852 Pt1 is the British Standard for flammability of upholstered composites for seating

BS4790 BS4790: 1987 Determination of the effects of a small source of ignition on textile floor coverings hot metal nut method (method 1, loose laid)

EN13773: 2003 Meets European fire safety standards for vertically hung fabrics. Burning behavior, ignitability testing of curtain fabric for use in the contract market.

TL 1080-0002/8 German Military Specification for horizontally tested materials

EN14041 Details the requirement for CE Marking of textiles, laminate and resilient floor coverings

BS7905-1:2001 Lifting equipment for performance, broadcast and similar applications.

ATTRIBUTES



Approx roll length of material in linear metres (m) & feet (ft)



Approx width of material in centimetres (cm) & inches (")



Approx weight in grams per metre squared (g/m²)



Approx thickness in (mm)

M1, M2, M4 Conforms to French Fire Regulations

B1, B2 Conforms to German Fire Regulations DIN 4102

IMO Conforms to International Maritime Organisation regulations

Classe Uno Meets Italian Fire Regulations

BS EN13501-1 Fire Classification of construction, products and building elements. Classification using test data from reaction to fire tests

CFC EN ISO 9239-1 Reaction to fire test. Horizontal surface spread of flame on floor covering system. Determination of the burning behaviour using a retardant heat source

NFPA 701 NFPA 701: (USA) Standard Methods of Fire Tests for Flame Propagation of Textiles and Films

EN9239-1 Reaction to fire tests – horizontal surface spread of flame on floor covering systems

DIN EN1021 Meets European fire safety standards for exposure to different ignition sources, namely a lit cigarette and butane flame. Assessment of the ignitability of upholstered furniture

Datasheet - Fabrics & Flooring


Matt White Projection Screen

To ensure you get the best from the product supplied to you, we advise you follow the care instructions within this datasheet.

A wide width dual screen ideal for when the same image brightness is required on both sides of the surface.

Fabric	Flame Retardancy	DFR
	Fire Certification	BS5867, M1, M2
	Brand Name (and Manufacturer)	J&C Joel Ltd.
	Material (Blending Ratio)	100% PVC
	Colour	White
	Construction of Fabric	Extruded
	Thickness	0.3mm
	Type of Screen	Front
Chemicals	Surface Treatments	None
	Brand Name of Flame Retardant Chemicals	N/A
	Chemical name of Flame Retardant Chemicals	N/A
	Process of Flame Retardant Chemicals	N/A
Care	Information	Durably Flame Retardant. This means that this type of projection screen is chemically treated to meet the flammability requirements of BS5867, M1 & M2. FR properties will be maintained if subject to moisture. For cleaning, use a soft damp cloth (water only).
	Laundering Treatment	     Do Not Dry Clean Do Not Wash Do Not Bleach Do Not Iron Do Not Tumble Dry
Notes		Clean using a mild detergent.


	Approx Roll Length: 50m / 164ft		Fire Rating: DFR
	Width: 230cm / 90"		Fire Certification: BS5867, M1, M2
	Weight: 470 g/m ²		Custom Dye N/A
	Gain: 1.0		Transmittance: N/A

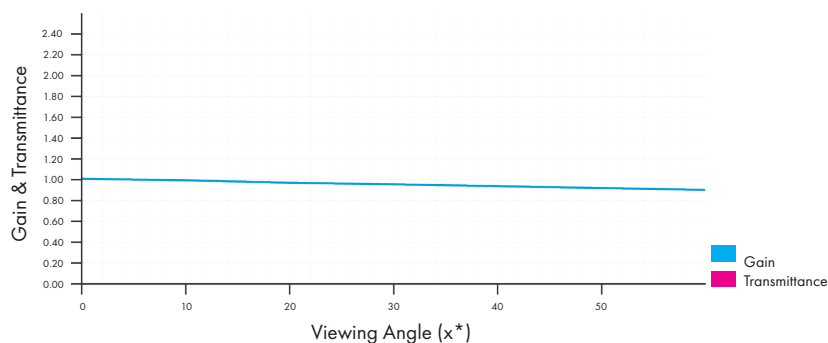


For further information please contact our sales team sales@jcjoel.com

Transmittance and gain perform in similar ways – a high gain (front projection) or transmittance (rear projection) screen will ultimately produce a brighter image in the centre of the viewing area. The higher the gain or transmittance the brighter the image will be making it more suitable for lower power projectors and environments with higher ambient light conditions.


A high gain or transmittance screen will narrow the viewing angle with an increased chance of hot spotting and lower brightness uniformity. Low gain or transmittance provide wider viewing angles and a more even light distribution, ensuring a uniform brightness across the screen, suitable for low ambient light conditions.

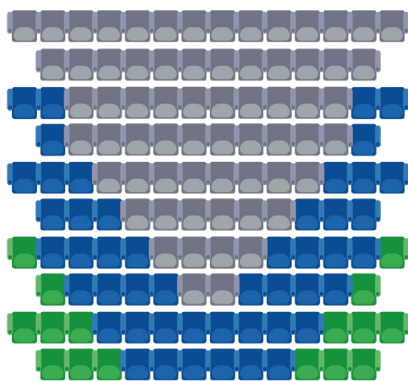

Mid Gain

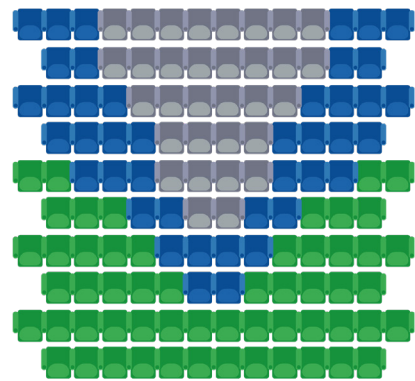

High Gain

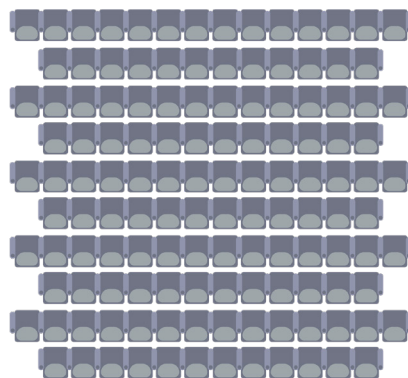

Unity Gain

Gain

Gain is a measurement of screen reflectivity and affects brightness of projected imagery on to a screen surface. The figure represents a ratio of the light back from the screen compared to that of a standard reference screen normally a uniform matt white surface with a gain of 1.0.

Transmittance

Transmittance differs from gain in that it is a measurement of light passing through a screen and therefore only applies to rear projection surfaces. The transmittance value is the ratio of light passed through a screen compared to light reflected from a reference matt white surface.

For further information please contact our sales team sales@jcjoel.com

Fire Test Certificate – Specimen

Fabric: Matt White - Projection Screen
Type: BS5867 Part 2 Type B

J&C Joel 
Inspiration in every performance



Wira House, West Park Ring Road,
Leeds, LS16 6QL, UK.
Telephone: +44 (0)113 259 1999
Email: info@bttg.co.uk
Website: www.bttg.co.uk

Date: 01 September 2017

Our Ref: 53939-3
Your Ref: -

Page: 1 of 4

Client: J. & C. Joel Limited
Corporation Mill
Corporation Street
Sowerby Bridge
Halifax
HX6 2QQ

Job Title: Surface Ignition Of Curtains & Drapes

Client's Order No: -

Date of Receipt: 21 August 2017
Date of Test Start: 01 September 2017

Description of Sample(s): One sample identified as follows was received for testing:
PVC Projection Screen, stated to be DFR

Work Requested: We were asked to make the following test:
BS 5867: Part 2: 2008 (2015): Type B Curtains, Drapes and Blinds



1066

Shirley® Technologies Limited. Registered Office: Wira House, West Park Ring Road, Leeds, LS16 6QL.
A company registered in England & Wales with company number 04669651. VAT Number GB 816764800.
The supply of all goods and services is subject to our standard terms of business, copies of which are available on request.
Our laboratories are accredited to EN ISO/IEC 17025.

Copyright © 2017 Shirley Technologies Limited. All rights reserved.

Fire Test Certificate – Specimen

Fabric: Matt White - Projection Screen
Type: BS5867 Part 2 Type B

J&C Joel 
Inspiration in every performance



J. & C. Joel Limited

Sample was identified as follows:

PVC Projection Screen, stated to be DFR

Wira House, West Park Ring Road,
Leeds, LS16 6QL, UK.
Telephone: +44 (0)113 259 1999
Email: info@bttg.co.uk
Website: www.bttg.co.uk

Date: 01 September 2017
Our Ref: 53939-3
Your Ref: -
Page: 2 of 4

BS 5867: Part 2: 2008 (2015): Type B Curtains, Drapes and Blinds
Testing as received.

Three specimens from both length and width were tested in accordance with BS EN ISO 15025: Procedure A (surface ignition): 2002. The sample was tested at 20 °C and 60 % relative humidity (R.H.).

Each specimen was subjected to an applied flame using propane and a 15 second flame application time. The results obtained (shown in the table below) were assessed according to the requirements of BS 5867: Part 2: 2008 (2015).

Pre-treatment

If the fabric is a pass in the 'as received' condition then the fabric is subjected a water soak procedure as specified in BS EN 1021: Annex D: 2006.


Testing after pre-treatment

Three specimens, after pre-treatment, from both length and width were tested following the procedure described above.

Test results relate only to the sample tested.

The results for all tests are given in the table(s) on the following page(s).

Reported by: 
J Coleman
Fire Technician

Countersigned By: 
P Doherty
Operational Head

Enquiries concerning this report should be addressed to Customer Services.



Shirley® Technologies Limited. Registered Office: Wira House, West Park Ring Road, Leeds, LS16 6QL.
A company registered in England & Wales with company number 04669651. VAT Number GB 816764800.
The supply of all goods and services is subject to our standard terms of business, copies of which are available on request.
Our laboratories are accredited to EN ISO/IEC 17025.

Copyright © 2017 Shirley Technologies Limited. All rights reserved.

Fire Test Certificate – Specimen

Fabric: Matt White - Projection Screen
Type: BS5867 Part 2 Type B

J&C Joel 
Inspiration in every performance



TESTING • CERTIFICATION • AUDITING

J. & C. Joel Limited

RESULTS

Sample Ref: PVC Projection Screen, stated to be DFR

Wira House, West Park Ring Road,
Leeds, LS16 6QL, UK.
Telephone: +44 (0)113 259 1999
Email: info@bttg.co.uk
Website: www.bttg.co.uk

Date: 01 September 2017

Our Ref: 53939-3

Your Ref: -

Page: 3 of 4

BS 5867: Part 2: 2008 (2015): Type B Curtains, Drapes and Blinds

Testing as Received

Specimen No.	Length			Width		
	1	2	3	4	5	6
Flame reached an edge	No	No	No	No	No	No
Hole reached an edge	No	No	No	No	No	No
Flaming debris separated	No	No	No	No	No	No

Requirements

Any "Yes" means fail except if only one specimen fails a further 6 specimens are tested, if the second 6 specimens all pass the result is a pass.

Result in 'as received': Pass

Testing after pre-treatment

Specimen No.	Length			Width		
	1	2	3	4	5	6
Flame reached an edge	No	No	No	No	No	No
Hole reached an edge	No	No	No	No	No	No
Flaming debris separated	No	No	No	No	No	No

Requirements

Any "Yes" means fail except if only one specimen fails a further 6 specimens are tested, if the second 6 specimens all pass the result is a pass.

Result in 'after pre-treatment': Pass



1066

Shirley* Technologies Limited. Registered Office: Wira House, West Park Ring Road, Leeds, LS16 6QL.
A company registered in England & Wales with company number 04669651. VAT Number GB 816764800.
The supply of all goods and services is subject to our standard terms of business, copies of which are available on request.
Our laboratories are accredited to EN ISO/IEC 17025.

Copyright © 2017 Shirley Technologies Limited. All rights reserved.

Fire Test Certificate – Specimen

Fabric: Matt White - Projection Screen
Type: BS5867 Part 2 Type B

J&C Joel 
Inspiration in every performance



TESTING • CERTIFICATION • AUDITING

Wira House, West Park Ring Road,
Leeds, LS16 6QL, UK.
Telephone: +44 (0)113 259 1999
Email: info@bttg.co.uk
Website: www.bttg.co.uk

Date: 01 September 2017

Our Ref: 53939-3
Your Ref: -

Page: 4 of 4

J. & C. Joel Limited

Conclusion

The fabric meets the Type B performance requirements of BS 5867: Part 2: 2008 (2015).

This material should be identified with the manufacturers name, trademark or other identifying mark, the statement 'Flammability complies with the requirements of BS 5867: Part 2: Type B and instructions of any special precautions to be taken concerning care (including cleansing) of the curtain, drape or window blind to be manufactured from the fabric, preferably using an appropriate care labelling symbol in accordance with BS EN 23758 and taking account of the pre-treatment using in this test and the requirements of Clause 4 of BS 5867: Part 2: 2008 (2015). If the fabric is unsuitable for cleansing, this shall be stated.

Uncertainty Budget

There is no uncertainty budget associated with BS 5867: Part 2: Type B as no measurements are determined, the pass/fail criteria is assessed visually.

SPECIMEN



1066

Shirley* Technologies Limited. Registered Office: Wira House, West Park Ring Road, Leeds, LS16 6QL.
A company registered in England & Wales with company number 04669651. VAT Number GB 816764800.
The supply of all goods and services is subject to our standard terms of business, copies of which are available on request.
Our laboratories are accredited to EN ISO/IEC 17025.

Copyright © 2017 Shirley Technologies Limited. All rights reserved.

Fire Test Certificate – Specimen

Fabric: Matt White - Projection Screen
Type: M1

J&C Joel 
Inspiration in every performance



LABORATOIRE CENTRAL DE LA PREFECTURE DE POLICE
39 bis rue de Dantzig 75015 PARIS
Std. 33(0)1 55 76 24 15 - Fax 33(0)1 55 76 23 94
pp-labcent@interieur.gouv.fr - www.lcpp.fr



MESURES PHYSIQUES ET SCIENCES DE L'INCENDIE
ESSAIS DE CONFORMITÉ ET EXAMEN DE MATÉRIELS

**PROCÈS-VERBAL DE CLASSEMENT
DE RÉACTION AU FEU D'UN MATÉRIAU**
PRÉVU À L'ARTICLE 5 DE L'ARRÊTÉ DU 21 NOVEMBRE 2002
Valable 5 ans à partir de la date de délivrance

PROCÈS-VERBAL N° 18/9951
et annexes de 6 pages

Marque commerciale : SUPER MAT NON PERFORE
Description sommaire : Toile plastifiée.
Composition globale : PVC, ignifugé dans la masse.
Masse : 480 g/m² environ.
Épaisseur : 0,31 millimètre environ.
Coloris : 1 (blanc).
Nature des essais : Essais au brûleur électrique et essais complémentaires

Classement :

M1


Durabilité du classement : Non limitée à priori

Compte tenu des critères résultant des essais décrits dans le rapport d'essai annexé n° 18/9951 du 25/10/2018.

Ce procès-verbal atteste uniquement des caractéristiques de l'échantillon soumis aux essais et ne préjuge pas des caractéristiques de produits similaires. Il ne constitue donc pas une certification de produits au sens de l'article L 115-27 du code de la consommation et de la loi du 3 juin 1994.

Fait à Paris, le 25/10/2018

Pour le Directeur,
le chef du pôle mesures physiques et sciences de
l'incendie


Jean-Pierre ORAZY



Le responsable technique


Jennifer CHERON

La reproduction de ce rapport n'est autorisée que sous la forme de fac-similé photographique intégral.

RAP0988_R09_PV+RE_JANV17-1

Fire Test Certificate – Specimen

Fabric: Matt White - Projection Screen
Type: M1

J&C Joel 
Inspiration in every performance



LABORATOIRE CENTRAL DE LA PREFECTURE DE POLICE
39 bis rue de Dantzig 75015 PARIS
Std. 33(0)1 55 76 24 15 - Fax 33(0)1 55 76 23 94
pp-labcent@interieur.gouv.fr - www.lcpp.fr



MESURES PHYSIQUES ET SCIENCES DE L'INCENDIE
ESSAIS DE CONFORMITÉ ET EXAMEN DE MATÉRIELS

RAPPORT D'ESSAI DE RÉACTION AU FEU D'UN MATÉRIAU

PRÉVU À L'ARTICLE 5 DE L'ARRÊTÉ DU 21 NOVEMBRE 2002

Valable 5 ans à partir de la date de délivrance

RAPPORT D'ESSAI N° 18/9951

ANNEXES

Sommaire

1 BUT DES ESSAIS	3
2 PROVENANCE ET CARACTÉRISTIQUES DES ÉCHANTILLONS	3
3 MODALITÉS DES ESSAIS ET RÉSULTATS	4
4 OBSERVATIONS CONCERNANT LES ESSAIS	7

NOTA : Ce rapport d'essai atteste uniquement des caractéristiques de l'échantillon soumis aux essais et ne préjuge pas des caractéristiques de produits similaires. Il ne constitue donc pas une certification de produits au sens de l'article L 115-27 du code de la consommation et de la loi du 3 juin 1994.

RAP0098_R02_PV+RE_JANV17-1

Fire Test Certificate – Specimen

Fabric: Matt White - Projection Screen
Type: M1

J&C Joel 
Inspiration in every performance



Rapport d'examen de dossier n° 18/9951/RG1

3/7

1 BUT DES ESSAIS

Les essais auxquels se rapporte le procès-verbal de même numéro ont pour but de déterminer le classement de réaction au feu des matériaux d'aménagement, conformément à l'article 3 et annexe 2 de l'arrêté du ministère de l'intérieur, de la sécurité intérieure et des libertés locales du 21 novembre 2002 (J.O. du 31 décembre 2002) modifié.

2 PROVENANCE ET CARACTÉRISTIQUES DES ÉCHANTILLONS

2.1 Demandeur

2.2 Producteur

2.3 Distributeur

Non communiqué

2.4 Marque commerciale

SUPER MAT NON PERFORE

2.5 Caractéristiques attestées par le demandeur

Composition : Matériau souple en PVC plastifié, ignifugé dans la masse ;
Masse au mètre carré : 450 g/m² environ ;
Épaisseur : 0,30 mm ;
Coloris présenté : 1 (blanc, aspect mat face avant).

2.6 Caractéristiques constatées par le laboratoire

Composition : Toile plastifiée ;
Masse au mètre carré : 480 g/m² déterminée sur des échantillons de 100 cm² ;
Épaisseur : 0,31 mm ;
Coloris testé : 1 (blanc).

Échantillons déposés le 26 septembre 2018.

Échantillons découpés par le déposant.

Essais effectués le 23 octobre 2018.

Fire Test Certificate – Specimen

Fabric: Matt White - Projection Screen
Type: M1

J&C Joel 
Inspiration in every performance



Rapport d'examen de dossier n° 18/9951/RG1

4/7

3 MODALITÉS DES ESSAIS ET RÉSULTATS

MODALITÉS DES ESSAIS

ESSAI PRINCIPAL :

- Essai au brûleur électrique (norme NF P 92-503 - décembre 1995)

ESSAIS COMPLÉMENTAIRES :

- Essai de persistance de flamme (norme NF P 92-504 - décembre 1995)

CONDITIONNEMENT DES ÉPROUVETTES

Les éprouvettes sont conditionnées, avant essai, dans une enceinte à $23\text{ °C} \pm 2\text{ °C}$ et $50\% \pm 5\%$ d'humidité relative pendant 7 jours ou jusqu'à obtention d'une masse constante. La masse est considérée constante quand deux pesées successives à 24 heures d'intervalles ne diffèrent pas de plus de 0,1% ou de 0,1 g.

Fire Test Certificate – Specimen

Fabric: Matt White - Projection Screen
Type: M1

J&C Joel 
Inspiration in every performance



Rapport d'examen de dossier n° 18/9951/RG1

5/7

RÉSULTATS DES ESSAIS

BRÛLEUR ÉLECTRIQUE

Caractéristiques des éprouvettes	Référence des échantillons	09/EC327	09/EC328	09/EC329	09/EC330
	Masse (en g)	52,3	52	52	52,1
	Dimensions (en mm)	600 x 180	600 x 180	600 x 180	600 x 180
	Épaisseur (en mm)	0,31	0,31	0,31	0,31
	Face	Endroit	Envers	Envers	Endroit
	Coloris	Blanc	Blanc	Blanc	Blanc
	Sens	-	-	-	-
Résultat des essais	Inflammations à (secondes)	50,7 / 110,9	Néant	25,4 / 50,6	Néant
	Durée de l'inflammation (secondes)	3 / 0,9	Néant	0,9 / 0,4	Néant
	Durée de l'inflammation supérieure à 5 secondes	NON	NON	NON	NON
	Chutes de gouttes et/ou débris enflammés	NON	NON	NON	NON
	Chutes de gouttes non enflammées	NON	NON	NON	NON
	Zones en ignition	NON	NON	NON	NON
	Largeur maximale de la zone détruite entre 450 et 600 mm	-	-	-	-
	Longueur de la zone totalement détruite ou carbonisée en mm	160	160	155	160

Valeur moyenne des largeurs maximales détruites entre 450 à 600 mm (en mm)	0
Valeur moyenne des longueurs totalement détruites ou carbonisées (en mm)	159

Fire Test Certificate – Specimen

Fabric: Matt White - Projection Screen
Type: M1

J&C Joel 
Inspiration in every performance



Rapport d'examen de dossier n° 18/9951/RG1

6/7

PERSISTANCE DE FLAMME

Caractéristiques des éprouvettes	Référence des échantillons	09/EC331	09/EC332	09/EC333	09/EC334
	Masse (en g)	51,3	50,8	51,3	51,1
	Dimensions (en mm)	460 x 230	460 x 230	460 x 230	460 x 230
	Épaisseur (en mm)	0,31	0,31	0,31	0,31
	Face	Endroit	Envers	Envers	Endroit
	Coloris	Blanc	Blanc	Blanc	Blanc
	Sens	-	-	-	-
Résultats des essais	Nombre d'inflammation de moins de 2 s	10	10	10	10
	Nombre d'inflammations entre 2 et 5 s	0	0	0	0
	Nombre d'inflammations de plus de 5 s	0	0	0	0
	Chute de gouttes ou débris enflammés	NON	NON	NON	NON

Fire Test Certificate – Specimen

Fabric: Matt White - Projection Screen
Type: M1

J&C Joel 
Inspiration in every performance



Rapport d'examen de dossier n° 18/9951/RG1

7/7

4 OBSERVATIONS CONCERNANT LES ESSAIS

Essai au brûleur électrique

Sous l'action du brûleur électrique et de la flamme pilote, le matériau carbonise, s'échancre et s'enflamme. La durée des inflammations est inférieure à 5 secondes. La longueur moyenne détruite sur les éprouvettes est inférieure à 350 millimètres.

Au cours des essais, il n'a pas été observé la chute de gouttes enflammées ou non.


Essai de persistance de flamme

Au cours des essais de propagation de flamme, il n'a pas été constaté de persistance de flamme supérieure à 2 secondes.

Il n'y a pas de chutes de gouttes enflammées ou non.

Fait à Paris, le 25/10/2018

Pour le Directeur,
le chef du pôle mesures physiques et sciences de
l'incendie


Jean-Pierre ORAZY



Le responsable technique


Jennifer CHERON

Fire Test Certificate – Specimen

Fabric: Matt White - Projection Screen
Type: M2

J&C Joel 
Inspiration in every performance

Dossier P217614 – Document DEC/3 – Page 1/5

LABORATOIRE
NATIONAL
DE MÉTROLOGIE
ET D'ESSAIS 
LABORATOIRE DE TRAPPES
29 Avenue Roger Hennequin – 78197 Trappes Cedex
Tél : 01 30 69 10 00 – Fax : 01 30 69 12 34

PROCES-VERBAL DE CLASSEMENT DE REACTION AU FEU D'UN MATERIAU

prévu à l'article 5 de l'arrêté du 21 novembre 2002

VALABLE 5 ANS à compter du 19 avril 2022

N° P217614 - DEC/3

et annexe de 4 pages

Marque commerciale :

Description sommaire :

Composition globale : Feuille de PVC blanche ignifugée dans la masse.

Utilisation : Ecran pour les événements

Masse : 450 g/m²

Epaisseur : 0,3 mm

Coloris : Blanc

Rapport d'essais : N° P217614 - DEC/3 du 19 avril 2022

Nature des essais : Détermination du classement selon NF P 92-507 (février 2004)
Essai au brûleur électrique selon NF P 92-503 (décembre 1995)

Classement :

M2

VALABLE POUR TOUTE APPLICATION NON COUVERTE PAR L'ART. AM18 §2 DE LA REGLEMENTATION ERP

Durabilité du classement (NF P 92-512 : 1986) : NON LIMITEE A PRIORI

compte tenu des critères résultant des essais décrits dans le rapport d'essai N° P217614 - DEC/3 annexé.
Pour déterminer le classement, il n'a pas été tenu compte de l'incertitude associée au résultat.

Ce procès verbal atteste uniquement des caractéristiques de l'échantillon soumis aux essais et ne préjuge pas des caractéristiques de produits similaires. Il ne constitue pas une certification de produits au sens de l'article L.115-27 du code de la consommation et de la loi du 3 juin 1994.

Est seule autorisée la reproduction intégrale soit du présent Procès-verbal de classement qui comprend 1 page soit l'intégralité du Procès-Verbal et rapport annexé qui **comporte 5 pages**.

Trappes, le 19 avril 2022



**Le Responsable du Département
Comportement au Feu et Sécurité Incendie**

Thibaut CORNILLON



Inspiration in every performance

A dark gray world map is centered in the background. Overlaid on the right side of the map is a vertical column of six circular icons. Each icon is divided into two halves: the left half is green and the right half is white. Inside each circle is a two-letter code representing a region. To the right of each circle is the regional office name and email address.

UK	J&C Joel United Kingdom - HQ uksales@jcjoel.com
EU	J&C Joel Europe eusales@jcjoel.com
ME	J&C Joel Middle East uaesales@jcjoel.com
VN	J&C Joel Vietnam asiasales@jcjoel.com
MO	J&C Joel Macau asiasales@jcjoel.com
HK	J&C Joel Hong Kong asiasales@jcjoel.com